




Pulverizing concrete; for best results you have to use the best equipment. And Verachtert's VHP hydraulic concrete pulveriser is the best there is. Demolition has always been a specialty of Verachtert, and the VHP series combines power and efficiency to deliver the optimum performance under all circumstances. This hydraulic pulveriser is fully featured. It has a high weight-to-closing force ratio. A very impressive jaw opening provides high yield every time. The jaw's cylinder is cleverly positioned to provide powerful closing forces. There's a differential valve on the cylinder that controls the speed of the cylinder's outward stroke to ensure quicker opening and closing of the jaw

for even faster cycle times. The cutting edges are reversible and detachable, and the VHP is equipped with a detachable ripper tooth and mutually exchangeable teeth. All in all, the VHP hydraulic concrete pulveriser offers an exceptional price/performance ratio with a quick return on investment ■



Features and benefits VHP

- 1 Detachable ripper tooth for high splitting force
- 2 High productivity thanks to wide jaw opening with powerful closing force
- 3 Specially shaped closed lower jaw for easy pulverizing and rebar separation
- 4 Hydraulic cylinder is fully protected for longer life
- 5 Bolt-on mounting bracket
- 6 Cylinder with differential valve for very short cycle times
- 7 Reversible cutting edges for cutting concrete

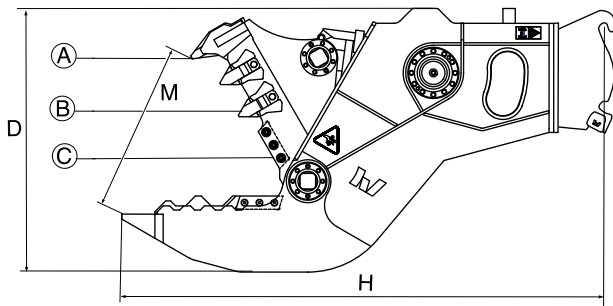

Specifications VHP	VHP-30	VHP-40	VHP-50	VHP-60
Excavator weight (ton)	15 - 25	20 - 35	35 - 60	60 - 85
Weight ± (kg)*	1700	2500	3500	6000
Closing power (A) (ton)	70	100	120	150
Closing power (B) (ton)	130	185	195	240
Closing power (C) (ton)	240	340	410	600
Height (H) (mm)	2400	2900	3300	4200
Height (D) (mm)	1400	1600	1850	2200
Width upper jaw (mm)	340	360	420	480
Width lower jaw (mm)	440	500	600	800
Maximum jaw opening (M) (mm)	850	1015	1215	1400
Length of knives (mm)	200	260	260	250
Optimum operating pressure opening/closing (bar)	350	350	350	350
Optimum oil output opening/closing (l/min)	150	200	300	400
Opening time jaw (sec)	4	5	4,5	5,5
Closing time jaw (sec)	3	3	3,5	4

*Weight includes standard Connect'omaat® quick-coupling suspension.

Your dealer:

